

CLEAR O₃

FOR OZONE PURE WATER

BULB REPLACEMENT

INSTALLATION MANUAL

NOTE: Ozone production from direct UV light will decline over time. UV bulbs continue to illuminate after they stop producing an effective level of ozone to clean your pool water. To make sure your pool continues to receive all the benefits of ozone, Paramount recommends that you replace your bulb every three (3) years or 13,000 operating hours.



WARNING

Turn off power at main source before making any electrical connections or servicing the unit.

UV light produced by this unit is harmful to the eyes and may cause blindness! Do not look directly at a lit bulb!

TROUBLESHOOTING & SERVICE

ISSUE	SOLUTION
No air bubbles entering system or pool	Clean filter then adjust airflow needle valve
Filter empties and pump loses prime	Replace check valve fitting at strainer pot
Light bulb does not light	Check power to the ClearO ₃ , if you have power and the bulb still doesn't light up, turn off the power and replace the bulb.

The ballast resets instantly on restoration of power. When the lamp restarts, it will light up orange first then turn blue in about 10 seconds. If the UV bulb still does not illuminate 1-800-627-5886 and ask for customer service for further instructions.

004-027-7849-00 REV040816

US and Foreign patents and patents pending see www.1paramount.com/about/patents/



295 East Corporate Place • Suite 100 • Chandler, AZ 85225

Toll Free: 1.800.621.5886 • Phone: 480.893.7607

Fax: 480.753.3397

Paramount@1Paramount.com • www.1Paramount.com



Paramount


Pool Life. Simplified.

REPLACING UV BULB


DO NOT TOUCH THE GLASS, HANDLE BY CERAMIC ENDS OF BULB




Turn the power off to filtration system pump at circuit breaker. Remove three screws in left end side cap labeled "electrical connections".

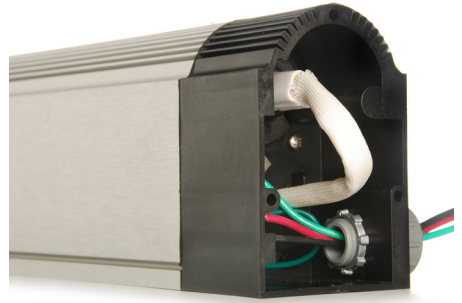


Remove side cap. Grasp light bulb plug and pull light out about one inch.

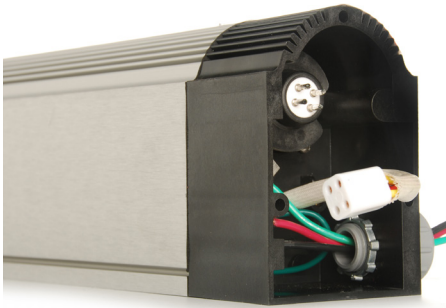


Remove plug from light bulb.

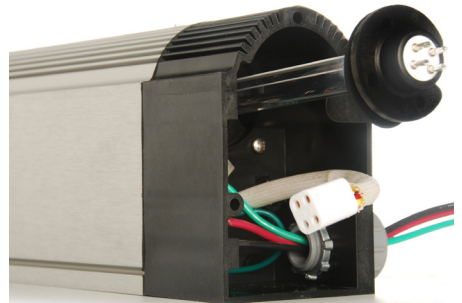

Pull light bulb free from Clear O3 unit.

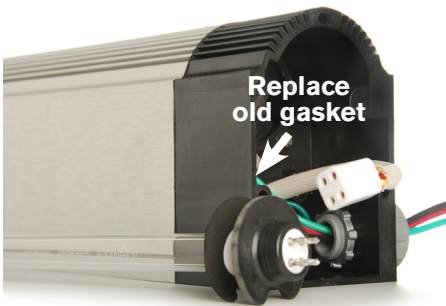

Remove and throw away the old gasket. Make sure new gasket is in place on replacement bulb. Align with key and slide into hole until bulb is completely into unit.

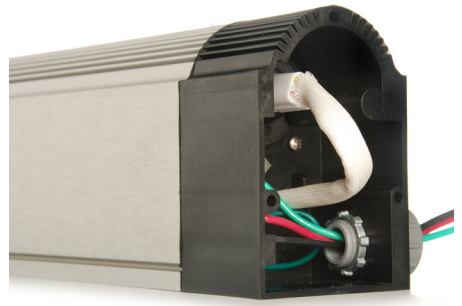

Press plug onto light bulb. Replace side cap and three screws. Turn on power to filtration system pump.

Check glow tube on the left front of the Clear O3. A light blue light indicates lamp is lit and the unit is producing ozone.